



# T290

## Walk-Behind Scrubber

### Simple Use for Congested Spaces

Its easy-to-maneuver design, intuitive controls and robust components provide for simple operation and maintenance. The T290 is ideal for cleaning small, congested areas found in retail stores and schools.




### A Reliable Clean

Robust construction in a compact scrubber with easy-to-use pad assist or self-propel configuration.



### Convenient Features

Avoid kneeling to put the brush on, with hands-free brush replacement with spin-on, spin-off feature.

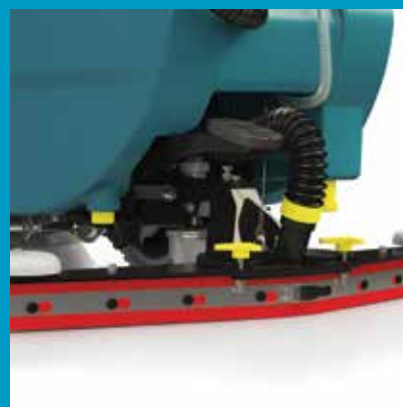

### Easy Daily Maintenance

Yellow touch points help reduce breakdowns by simplifying preventative maintenance.

# Inside the T290

- 1. Intuitive control panel** with an indicator light when solution tank level is low.
- 2. Easy access** to internal components with tank that tilts back.
- 3. Easy-to-inspect** in-line solution filter.
- 4. Consistent water pick-up** with durable "V" shaped squeegee design and standard Linatex® squeegee blades.
- 5. Optimum cleaning performance,** with self-leveling brush/pad.



## T290 Specifications

FEATURE	SPECIFICATION	
	PAD ASSIST	SELF-PROPEL
Cleaning path	500 mm	
Productivity (per hour) theoretical max	1,820 m <sup>2</sup> /hr	
Estimated coverage (per hour)*	1,122 m <sup>2</sup> /hr	
Scrubbing speed	3.5 kmh	3.5 kmh
Scrub head raise/lower	manual with foot pedal	
Brush/pad speed	155 rpm	
Brush/pad pressure	18 kg	
Solution tank capacity	40 L	
Recovery tank capacity	50 L	
Battery run time - up-to hours (150AH Gel Battery)**	3.0	2.6
Battery voltage	24V (2x12)	
Dimensions (L x W x H)	1,230 x 516 x 960 mm	
Squeegee width	815 mm	
Weight (with heaviest battery)	157 kg	162 kg
Sound level (operator's ear)***	74 dB	

*Specifications subject to change without notice.*  
 \* Estimated coverage rates use the practical speed and empty/fill time standards from the 2004 ISSA Cleaning Times handbook.  
 \*\* Run times are based on Continuous Scrubbing Run Times.  
 \*\*\* Sound levels per ISO 11201 as recommended by the American Association of Cleaning Equipment Manufacturers & OSHA

For a demonstration or additional information, call **+1.800.553.8033** or email **info@tennantco.com**

### Tennant Australia

Unit 11, 4 Southridge Street  
 Eastern Creek NSW 2766  
 T: 1800 226 843 (FREE CALL)  
 T: +61 2 9839 9700

www.tennantco.com.au  
 contactus@tennantco.com

### Tennant New Zealand

Unit 5, 103 Cryers Road  
 East Tamaki  
 Auckland 2013  
 T: +64 9 253 9013  
 F: +64 9 253 9015

www.tennantco.co.nz  
 contactus@tennantco.com